

Knauf "L" Angle Sections

Galvanized lightweight steel sections to be used as a perimeter framing and suspender for conventional drywall ceiling system. Knauf ceiling metal sections are cold-rolled from high-grade galvanized steel sheets that complies with EN 10327.

Knauf “L” Angle Sections EN-BS




Product Description

Galvanized lightweight steel sections to be used as a perimeter framing and suspender for conventional drywall ceiling system. Knauf ceiling metal sections are cold-rolled from high-grade galvanized steel sheets that complies with EN 10327.

Technical Data

Thickness (mm)	Dimensions (mm)			Pallet Details		
	Web	Flange	Length	Meters Per Pack	Pieces Per Pack	Weight (Kg approx.)
0.5	25	23	3000	2880	960	504.00

Profile Section Details

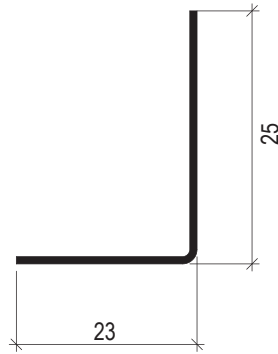

Note:

Knauf Head Office

- ▶ Phone: +971 4 337 7170
- ▶ Fax: +971 4 334 9659
- ▶ P.O. Box: 112871, Dubai
- ▶ info@knauf.ae

Knauf Qatar Branch

P.O.Box 27111
Doha, State of Qatar
Tel: +974 44528191
Fax: +974 44528181

Knauf Manufacturing Plant

P.O.Box 50006
Ras Al Khaimah, U.A.E.
Tel: +971 7 221 5300
Fax: +971 7 221 5301

Made in UAE

The information provided in this leaflet is only intended to give guidance in selecting and using Knauf products. While we make every effort to ensure its accuracy, neither Knauf LLC and its branches nor any of this employees or affiliates warrant or assume any legal liability or responsibility for the completeness or usefulness of any failure in installation or constructing structure installation or building or caused by using this leaflet. Readers are advised to independently verify this information prior to reply on it. In particular, readers must obtain appropriate independent advice on the use of products in specific structures, installations or buildings to ensure compliance with all regulations, including health and safety regulations. Knauf reserves the right to amend technical specification without notice.