


KNAUF

كناؤف

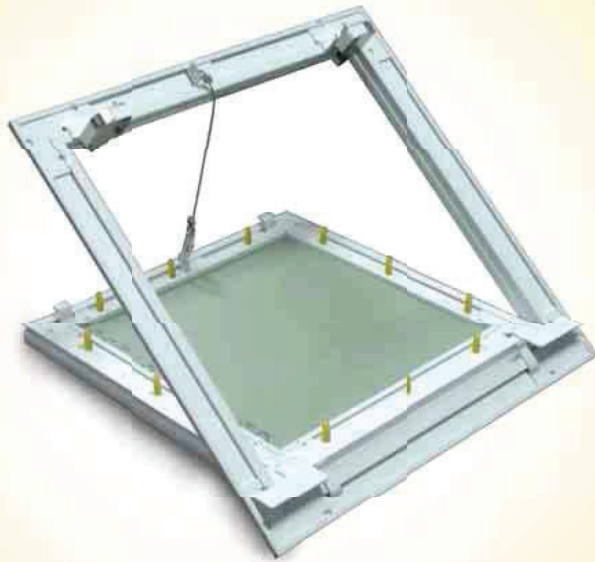

Technical Datasheet

03 -2018

Knauf A@TCH Regular Access Panel

Knauf A@TCH Regular Access Panels adapt perfectly to any environment, whether its for a wall or ceiling, in a public building or at home, Knauf Regular Access Panels satisfy all the majority of requirements and therefore are the optimal solution for most building structures. The flush bonded Knauf MR Board allows for flawless surfaces with minimal effort.



Certified by Intertek

Knauf **A@TCH** Regular Access Panel EN-BS

Product Description

Knauf **A@TCH** Regular Access Panels adapt perfectly to any environment, whether its for a wall or ceiling, in a public building or at home,

Knauf Regular Access Panels satisfy all the majority of requirements and therefore are the optimal solution for most building structures. The flush bonded Knauf MR Board allows for flawless surfaces with minimal effort.

Application

- Suitable for installation within drywall partitions and ceilings
- Ready for direct tiling on-site
- Prepared for surface finishing quality Q4 (On site)

Properties

- Corners of the frame are reinforced with non-corrosive galvanized steel angles
- Self-activating pressured spring locks
- Flush bonded gypsum board made of Knauf compliant EN520 MR Moisture-resitant boards
- Safety latch secured by galvanized angle on the inner side of frame
- Various dimensions available (upon request)

Technical Data

Material

Frames made from stable aluminium profile.

BS EN 755 - 9: 2016

Manufactured to: ISO 9001: 2008

Connecting Frame Parts:

Galvanized steel

Material Inlay:

Knauf EN 520 compliant (MR)
Moisture resistant gypsum board.

Material Screws

Phosphated, rust-prevented, spike protected with cap.

Closing / Opening Mechanism:

2 x Spring loaded galvanized steel locks with safety chain

Size:

Standard Sizes

- 200 x 200 mm

- 300 x 300 mm

- 400 x 400 mm

- 450 x 450 mm

- 500 x 500 mm

- 600 x 600 mm

- 600 x 1200 mm

Note:

Actual door opening size

- 195 x 195 mm

- 295 x 295 mm

- 395 x 395 mm

- 445 x 445 mm

- 495 x 495 mm

- 595 x 595 mm

- 595 x 1195 mm

Note To Painter:

- Generally remove the access door panel prior to coating and paint seperately so that no excess paints penetrates the narrow joint between the frame and the access door. This prevents any problems arising when opeing and closing the access door.

Please contact our sales department for inquiries about storage and packing.

Knauf Head Office

▶ Phone: +971 4 337 7170

▶ Fax: +971 4 334 9659

▶ P.O.Box: 112871, Dubai

▶ info@knauf.ae

Knauf Manufacturing Plant

P.O Box 50006
Ras Al Khaimah, U.A.E.
Tel: +971 7 268 9837
Fax: +971 7 221 5301

Knauf Gypsum India Pvt.Ltd

No. 8 - C, 8th Floor Commercial Complex
Doshi Tower, New No. 205, (Old No.156)
Poonamallee High Road,
Kilpauk Chennai - 600010
Tamil Nadu, India
Tel: +91 44 49580000
Fax: +91 44 49575300



Disclaimer:

The information provided in this leaflet is only intended to give guidance in selecting and using Knauf products. While we make every effort to ensure its accuracy, neither Knauf LLC and its branches nor any of its employees or affiliates warrant or assume any legal liability or responsibility for the completeness or usefulness of any failure in installation or constructing any structure installation or building or caused by using this leaflet. Readers are advised to independently verify this information prior to rely on it. In particular, readers must obtain appropriate independent advice on the use in specific structures, insllations or buildings to ensure compliance with all regulations, including health and safety regulations. Knauf reserves the right to amend technical specification.